

Parkwood – Site Rules

First aid point and fire meet point at car park at sign in desk.

Seatbelts are COMPULSORY for all people in vehicles (driver and passenger/s).

Silencers (exhausts) must be fitted and must be effective.

On site speed limit is 10mph or less.

Site driving:

- Blue easy route for standard road going vehicles.
- Red medium/hard route for road going with suitable tyres etc.
- Black difficult, for prepared vehicles only roll caged only vehicles.

The driver is responsible for assessing obstacles on the site with consideration for both vehicle and drivers capability, especially where water depth is concerned.


Vehicle Safety

- All vehicles must be safe i.e. all loose objects including batteries must be FIXED DOWN. (not with cable ties)
- All body panels must be IN PLACE and SECURE.
- Proper restraints (seat belts) must be fitted AND USED.

Parents are responsible for their children whilst on site.

VERY IMPORTANT SAFETY ADVICE

Winching and recovery can be dangerous if safety procedures are not in place, All equipment including but not restricted to, Winches, Ropes, Strops, Shackles, Swivels, Pulleys, should be inspected before every use, No operations should be commenced until the operator/user has made sure that it is safe to do so, NO person should be allowed within 10 feet (3 metres) of any recovery equipment being placed under load, NO person should be allowed in front of, behind, or in the direct line of any vehicle or load being moved or recovered

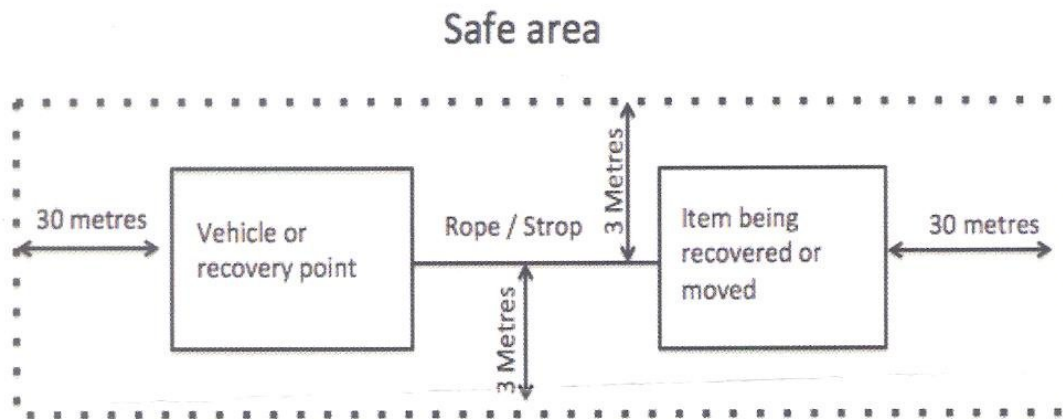

Safe area

WINCH SAFETY

ALL recovery winches should be fitted with an accessible battery isolator, which MUST be off when the winch is not in use (legal requirement for vehicles with winches used on the road)

The operator / user MUST ensure that no person (including himself) is allowed to be near the winch when it is operating, And no Person is allowed near the rope or accessories under load (see safe area)

The operator/user MUST be certain that all recovery equipment is in good condition and is capable of handling the load to be imposed (with a suitable safety factor)

The operator/user must manage the winching operation in a safe manner, and ensure that the winch rope spools evenly on the drum, without bunching, otherwise damage can occur to the rope and or winch, which could result in failure